
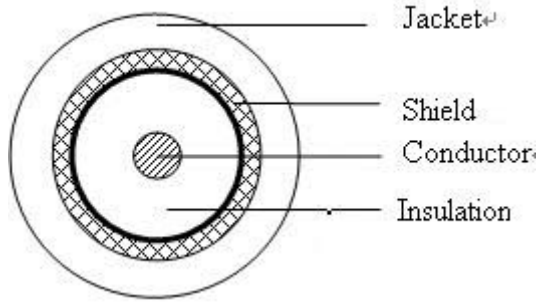


TECHNICAL SPECIFICATION											
CABLE TYPE		RG 58/U Coaxial Cable									
STRUCTURE											
Conductor	Composition(No./mm)	1/0.8mm									
	Material	Bare Copper Wire									
	Outside Diameter (mm)	0.80±0.02mm									
Insulation	Material	Solid Polyethylene									
	Thickness (mm)	1.10mm									
	Nom. Diameter(mm)	3.0±0.10mm									
Shield	Material	Bare Copper Wire									
	Construction	16x7/0.12mm									
	Coverage	90%									
	Diameter(mm)	0.12±0.008mm									
Jacket	Material	PVC									
	Diameter(mm)	5.0±0.10mm									
	Color	Black									
Printing	RG 58/U Coaxial Cable										
ELECTRICAL CHARACTERISTIC											
Impedance	$\Omega$	50±5									
Insulation Resistance	M $\Omega$ / km	1000↑									
Capacitance	pF/M	94±3									
Attenuation	Frequency(MHz)	100	200	300	400	500					
	dB/100M	14.8	22.3	32.8	45.9	52.8					
											
							DRWN	Vivien Cheng		DRWN. No.:	
							CHKD	C.H. Liu		4174U08009001M1	
							APPD	Vincent Shen		Date: FEB. 01, 2005	